


Scheda Tecnica

NVR TECNOACCESSORI® MOD. TC-NVR4K-6008N



	Model	NVR6009KL
System	Main processor	XM8536D
	Operating System	Embedded Linux
	System resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/2/4/6/8/9
Video	Video input (IP)	9*4K Unreal-time (Access bandwidth 60Mbps)
	Video compression	H.265A/H.265+(compatible H.265/H.264)
	Display quality	Max:5M
	Playback quality	5M/4M/3M/1080P
	Decode	2ch5M/2ch4M/3ch3M/4ch1080P
	VR	support
	human shape / Face	Support(depend on camera)
Audio	Audio compression	G.711A
	Intercom	support
Record & playback	Recording mode	Manual>Alarm>Dynamic Detection>Timing
	Local payback	2ch5M/2ch4M/3ch3M/4ch1080P
	Search mode	Search by Time/Calendar/Event/Channel/Face
	Record storage	HDD、 Network
	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
External interface	Video output	1ch VGA, 1ch HDMI HD output
	Audio I/O	1/1 (3.5mm)
	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M Adaptive Ethernet port
	USB interface	2*USB2.0 ports(one USB extension interface is reserved)
	HDD	1* SATA(Up to 14TB for each disk)
	ESATA	No
Serial interface	No	
Other	ONVIF	Support
	Power supply	12V/2A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0℃ — 55℃, Humidity:10%— 90%RH , Atm:86kpa — 106kp
	Dimension	
	Weight	

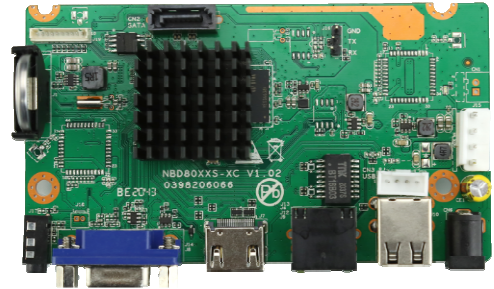

TTECNO®
Accessori

Modello: TC-NVR4K-6008N
Mobile Phone APP (Xmeye)
SATA: 1xHDD
Power : DC12V - 2A

Prodotto Importato e Distribuito dal Rispettivo Proprietario del
Marchio Tecnoaccessori®
Registro AEE: IT20060000012252
Registro Pile: IT20060P00006239 - CONAI: 12937010

20200600651

CE RoHS compliant

Made In China

Le caratteristiche possono subire variazioni senza preavviso a causa della continua evoluzione dei prodotti