


Scheda Tecnica

NVR TECNOACCESSORI® MOD. TC-NVR4K-6016N

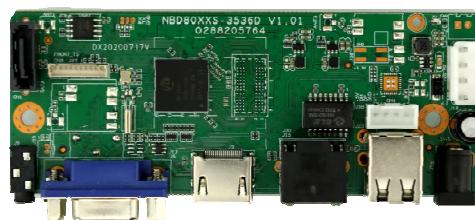

Parameters:	Model	NVR6016KL
System	Main processor	Hi3536E
	Operating System	Embedded Linux
	System resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/8/9/16
Video	Video input (IP)	16*4K (Access bandwidth 72Mbps)
	Video compression	H.265A/H.265+(compatible H.265/H.264)
	Display quality	Max:4K
	Playback quality	4K/5M/4M/3M/1080P
	VR	Unsupport
	human shape / Face	Support(depend on camera)
Audio	Audio compression	G.711A
	Intercom	unsupport
Record & playback	Recording mode	Manual>Alarm>Dynamic Detection>Timing
	Local playback(real-time+Un real-time)	4K (1*real-time) /5M (1+1) /4M (2+1) /3M (3+1) /1080P (5+1)
	Search mode	Search by Time/Calendar/Event/Channel/Face
	Record storage	HDD、Network
	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
External interface	Video output	1ch VGA, 1ch HDMI HD output
	Audio I/O	0/1 (3.5MM audio output)
	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M Adaptive Ethernet port
	USB interface	2*USB2.0 ports(one USB extension interface is reserved)
	HDD	1 SATA(Up to 14TB for each disk)
	ESATA	No
Serial interface	No	
Other	ONVIF	Support
	Power supply	12V/2A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0℃ — 55℃, Humidity:10% — 90%RH , Atm:86kpa — 106kp
	Dimension	
	Weight	

TECNO®
Accessori

Modello: TC-NVR4K-6016N
Mobile Phone APP (Xmeye)
SATA: 1xHDD
Power : DC12V - 2A

Prodotto Importato e Distribuito dal Rispettivo Proprietario del
Marchio Tecnoaccessori®
Registro AEE: IT20060000012252
Registro Pile: IT20060P00006239 - CONAI: 12937010



Made In China



Le caratteristiche possono subire variazioni senza preavviso a causa della continua evoluzione dei prodotti